

Innovative Designs Inspiring Change.

The **#1 Rated** Brand in Recycling & Waste Containers!

🖈 Trustpilot

Sessanta[™] Series

Add some flavor to your dine-in space

Product Data Sheet | Version 1.5





Busch Systems International Inc. 81 Rawson Avenue, Barrie ON., Canada 1.800.565.9931 buschsystems.com





ADD SOME *Haver* TO YOUR DINE-IN SPACE

Upgrade your recycling & waste program with a design that is compatible with your industry's needs. The Sessanta[™] is built with practicality in mind and offers a sleek design on a budget without compromising quality. Adding the Sessanta[™] to your restaurant or food court will maximize your diversion rate while complementing your décor.

POPULAR SKU'S










208425



BODY SPECIFICATIONS

Below are the available Body Options for the Sessanta[™] Series. With this measurement guide you will find the right size Sessanta[™] Series container to fit your space. The measurement guide is the essence of various standard measuring methods. All measurements are in inches. Talk to your dedicated Busch Systems[®] sales representative for more information on how to choose the right size container for your space.

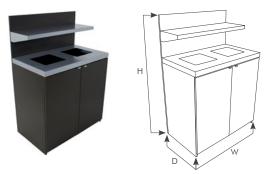

BODIES

Body Shape	Height	Width	Depth	Weight	Capacity
Double w/Tray*	54″H (1371.6mm)	37″W (939.8mm)	22″D (558.8mm)	132lbs (59.874kg)	64 gal
Triple w/Tray*	54″H (1371.6mm)	37″W (939.8mm)	22″D (558.8mm)	138lbs (62.596kg)	69 gal
Double w/Sign Frame	54″H (1371.6mm)	37″W (939.8mm)	22″D (558.8mm)	132lbs (59.874kg)	64 gal
Triple w/Sign Frame	54″H (1371.6mm)	37″W (939.8mm)	22″D (558.8mm)	138lbs (62.596kg)	69 gal

*Tray Only Dimensions: 4"H (101.6m) x 36"W (914.4mm) x 12"D (304.8mm)

STOCK BODY COLORS



LID & OPENING SPECIFICATIONS

The chart below outlines the available Lid Opening Options for the Sessanta[™] Series body as well as the associated opening dimensions. Be sure to run a preliminary audit of the popular materials that are discarded where your Sessanta[™] Series containers will be placed. Talk to your dedicated Busch Systems[®] sales representative for more information.

	Double Full	Triple Full	
Lid Dimensions	21.25" D x 37" W x 2"H 539.75mm D x 939.8mm W x 50.8mm H	21.25" D x 37" W x 2"H 539.75mm D x 939.8mm W x 50.8mm H	
Opening Dimensions	11″W x 11″D 279.4mm W x 279.4mm D	8.5"W x 8.5"D 215.9mm W x 215.9mm D	

STOCK LID COLORS








STOCK LABELS & SIGNS

These premium labels come standard with a black background and white text. All labels are able to be customized. The stock signs come standard as shown below, and all signs can be customized to match your unique branding and stream requirements.

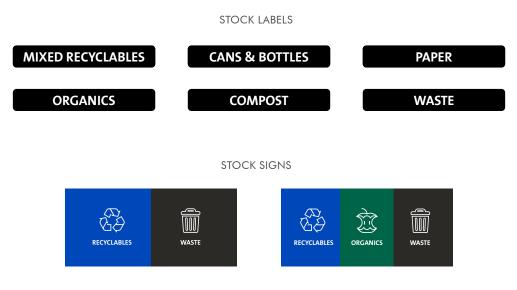

NOTE: Because different computers, monitors, and printers render colors and textures differently, actual finishes may vary from those shown here.



IDEAL BAG SIZES

Sessanta™ Series	Double	Triple
Ideal Bag Size (inches)	36 x 39	31 x 39

MATERIAL & CONSTRUCTION DETAILS

Not all recycling & waste receptacles are created equal. Our company policy is never to compromise on our workmanship or the quality material standards we've set. We only recommend and use quality first grade materials on our recycling & waste containers, and source these from OEM's at highly-competitive prices. Being a manufacturer that buys at high-quantities gives significant buying power with companies which in turn saves you money.

The design process, materials used, finishes and manufacturing standards all affect the final product. Every decision is vital to getting the most value for your investment. You deserve recycling & waste containers that meets your demands for quality and durability and will enhance your working environment for years to come.

Component	Material(s)	Construction
Bodies	Coated Composite Board	• High-density & moisture resistant with excellent dimensional stability
Lids	Powder Coated Steel	Platinum powder coat finish
Liners	HDPE	Made of 100% post-consumer recycled material
Sign Frames	Powder Coated Steel	Platinum powder coat finish

ENVIRONMENTAL CONSIDERATIONS

- All Sessanta[™] Series Receptacles use a low energy, resource efficient manufacturing and curing process
- All Sessanta™ Series receptacle components disassemble at end of life and are fully recyclable
- Low maintenance and extremely long service life
- Manufactured in North America
- <u>Product Carbon Footprint Dashboard for 1 Unit Sessanta™ Bin</u>

Configurations	Post-Industrial	Post-Consumer	Total Recycled	3rd Party
	Recycled Content	Recycled Content	Content	Certifications
Sessanta [™] Series	Contact us	Contact us	Contact us	-

Busch Systems[®] is dedicated to environmental responsibility. We maintain an Environmental Management System and are continually working to improve our impact through efficiency, material selection, vendor education, employee involvement, and an unwavering commitment to being a B-Corporation[®]. If you would like additional information on our product development process or if you don't see the information you need for your project on this page, please contact our Sustainability Team at sustainability@buschsystems.com.

California Proposition 65 (Prop 65), REACH (Registration, Evaluation, and Authorization of Chemical Substances – EC1907/2006)

This product series is compliant with both Prop 65 and REACH regulations. We have tested all materials and substances used in production to ensure they don't contain any harmful chemicals listed in these regulations. We prioritize product safety and have implemented strict quality control measures to ensure our products meet or exceed regulatory requirements. Customers can confidently use our product knowing it meets the highest safety standards.



LEAD TIME

Our standard lead times on the Sessanta[™] Series are 2-3 weeks, and 6-8 weeks on custom or larae orders. Please contact us to discuss your specific timing requirements.

PRICING

Please contact us at 800.565.9931 or sales@buschsystems.com. At Busch Systems®, we design, manufacture and sell our products directly to you. Our sales team is available to assist you with questions about our products, requests for quotes, and orders. Vertical Managers are located across North America to assist with the front-end specification and quoting process, and our in-house Project Sales Coordinators follow your project through from the time you place an order to shipment.

TO ORDER PLEASE SPECIFY

Quantity, body model, lid model, label choice and any optional product accessories. Talk to your dedicated Busch Systems® sales representative for more information. If you do not have a dedicated Sales Representative please contact us via our website at buschsystems.com/contact-us/

INSTALLATION

Busch Systems® Sessanta™ Series containers are hassle-free when it comes to installation. Each container comes fully-assembled and individually boxed using high-density cardboard with high-recycled content to ensure safe and environmentally friendly transport.

TO INSTALL YOUR SESSANTA[™] SERIES CONTAINERS:

- 1. Unbox each station
- 2. Apply your chosen labels
- 3. (only for sign frame model) Insert sign into frame
- 4. Insert the recycling/waste bag into each liner and wrap the top edge of the bag around the liner.

CARE & MAINTENANCE

Advantages of Busch Systems® Composite Board receptacles include:

- Highly-durable material and is able to withstand physical stress to a greater degree than wood.
- Minor dings and scratches are much less likely to bend your containers out of shape or leave the finished scratched.
- More moisture and heat resistant when compared to wood, allowing for them to better stand up to the stress associated with heavy use.

Their appearance and lifespan will be greatly affected by their care. The frequency of cleaning required depends on the environment in which the containers are used. The Sessanta® Series is intended for Indoor Use Only.

To avoid the accumulation of dirt and grime on your Busch Systems® products, and help prevent corrosion, we recommend that a mild detergent be used (not an abrasive), such as a pH-neutral liquid (hand dishwashing or hand car washing soaps, for example) diluted in warm water. Wipe with a clean wet cloth and towel dry. Any dirt adhering to the powder coating should be removed. In order to remove deposits such as salt or dust, use a soft brush (non-abrasive). If this is not sufficient to remove stubborn soiling, the following products have been tested for use:

Ajax Cream Flash (in water)

Cleaners with chloride or bleach

Cutting compound ('T. Cut')

Trapped moisture between product and things like rubber mats

Note: Always test soaps/cleaners on a hidden and/or small area beforehand

Liquid Gumption Ajax Liquid (in water) ٠ ٠

If solvents are absolutely needed to remove marks, a soft cloth dampened with white spirit may be used.

GENERAL CARE

- ٠ Clean with a mild detergent and damp sponge or cloth
- For tougher cleaning purposes, Lysol, TSP or Spray Nine may be used
- To remove permanent marker on melamine, use a small amount of Lacquer Thinner or Acetone on a cotton rag ٠

THINGS TO AVOID

Steel wool or Scouring pads

- Strong Solvents
- Abrasive detergents





